


Analog Video Cables

eurocable offers a wide range of video coaxial cables, suitable for all analog video transmissions.

Shielded with copper braid and PVC jacketed to guarantee long life and high flexibility.

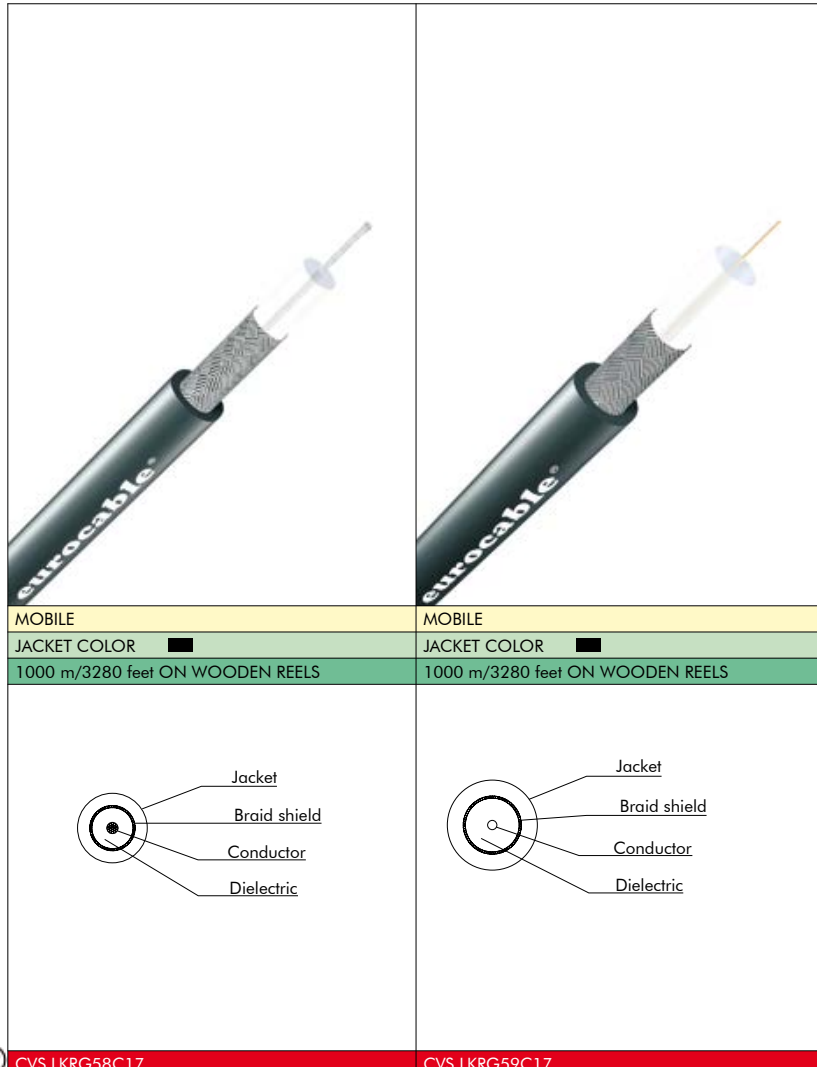

CVS LKRG58C17 CVS LKRG59C17

ELECTRICAL DATA			
D.C.R. at 20°C	Conductor	36.50 ohm/km	154 ohm/km
	Shield	14 ohm/km	9 ohm/km
Capacitance at 20°C		100 pF/m	67 pF/m
Nominal Impedance		50 ohm	75 ohm
Attenuation	10 MHz	4.10 db/100 m	3.10 db/100 m
	50 MHz	9.70 db/100 m	7.40 db/100 m
	100 MHz	13.90 db/100 m	10.70 db/100 m
	200 MHz	20.40 db/100 m	15.70 db/100 m
Vel. of Prop.		66%	
GENERAL DATA			
Cable	O.D.	5.00 mm	6.20 mm
	Standard reels	1000 m	
	Weight Kg/100m	4.00	5.60
	Operating temperature	-20°C/+70°C	
Jacket	Material	PVC	
	Nominal Thickness	0.75 mm	1.10 mm
Shield	Material	Tinned copper	Bare copper
	Coverage	Braid shield	
		95%	95%
Conductor	Quantity	1	
	Strand	19 x 0.18 mm	1 x 0.58 mm
	Area/AWG	0.48 mm ² /25	0.26 mm ² /23
	Dielectric O.D.	2.95 mm	3.70 mm
	Material	Annealed tinned copper, polyethylene insulated	Coppered steel, polyethylene insulated

Not suitable for applications above 50 volt ac; 75 volt dc.