


# Speaker Cables

All **eurocable** speaker cables are composed of flame resistant PVC and known for their extreme flexibility due to the very high strand count of individual conductors.

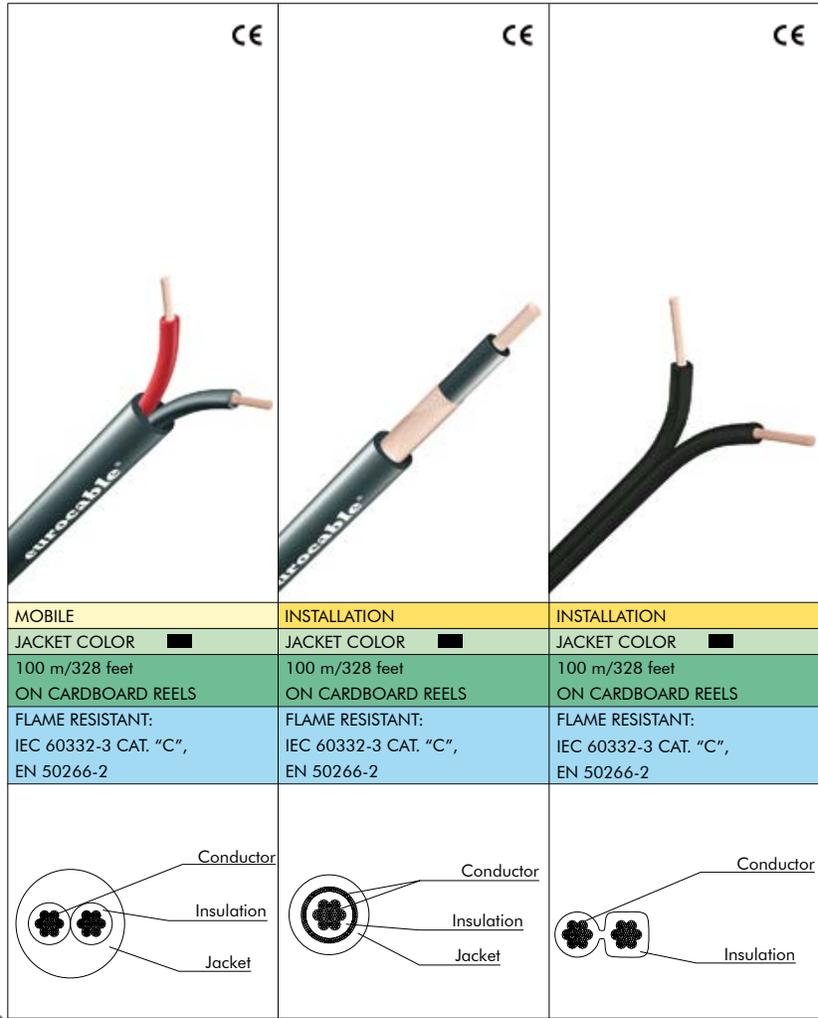

MOBILE INSTALLATION INSTALLATION

JACKET COLOR	■	JACKET COLOR	■	JACKET COLOR	■
100 m/328 feet		100 m/328 feet		100 m/328 feet	
ON CARDBOARD REELS		ON CARDBOARD REELS		ON CARDBOARD REELS	
FLAME RESISTANT: IEC 60332-3 CAT. "C", EN 50266-2		FLAME RESISTANT: IEC 60332-3 CAT. "C", EN 50266-2		FLAME RESISTANT: IEC 60332-3 CAT. "C", EN 50266-2	



CVS LKCode		02N15	02N25	02N40	02N25C	02N15P	02N25P
<b>GENERAL DATA</b>							
Cable	O.D.	8.00 mm	9.20 mm	11.50 mm	5.70 mm	3.50 x 7.40 mm	4.00 x 8.40 mm
	Standard reels	100 m					
	Weight Kg/100m	9.60	14.30	20.50	8.10	5.50	7.90
Operating temperature		+5°C/+70°C			-20°C/+70°C		
Jacket	Material	PVC flame resistant					
	Nominal Thickness	1.20 mm	1.00 mm	1.50 mm	≥ 1.00 mm		0.70 mm
Conductor	D.C.R. [ ohm/km ] at 20° C	13	8	5	8	13	8
	Quantity, Conductor	2 x 48 x 0.2	2 x 80 x 0.2	2 x 128 x 0.2	1 x 80 x 0.2	2 x 48 x 0.2	2 x 80 x 0.2
	Strand, Shield	-			2 x 12 x 6 x 0.15	-	
	Area/AWG	1.5 mm <sup>2</sup> /16	2.5 mm <sup>2</sup> /13	4.0 mm <sup>2</sup> /11	2.5 mm <sup>2</sup> /13	1.5 mm <sup>2</sup> /16	2.5 mm <sup>2</sup> /13
	Insul. O.D.	2.8 mm	3.4 mm	4.0 mm	-		
Material		Bare copper fire resistant PVC insulated				Bare copper PVC insulated	

## Speaker cable with Neutrik speakON connectors

## SIGNAL INTEGRITY

**S21FX215**

Speaker cable 2x1.5 mm<sup>2</sup> wired with Neutrik speakON 50A connectors



**S21FX225**

Speaker cable 2x2.5 mm<sup>2</sup> wired with Neutrik speakON 50A connectors




\* Length (meters): **3 5 10 15**  
 Feet  Meters

With packaging, no heat shrink  
 No packaging, no heat shrink


No packaging, with heat shrink  
 With packaging and heat shrink

# Speaker Cables

All **eurocable** speaker cables are known for their extreme flexibility due to the very high strand count of individual conductors.

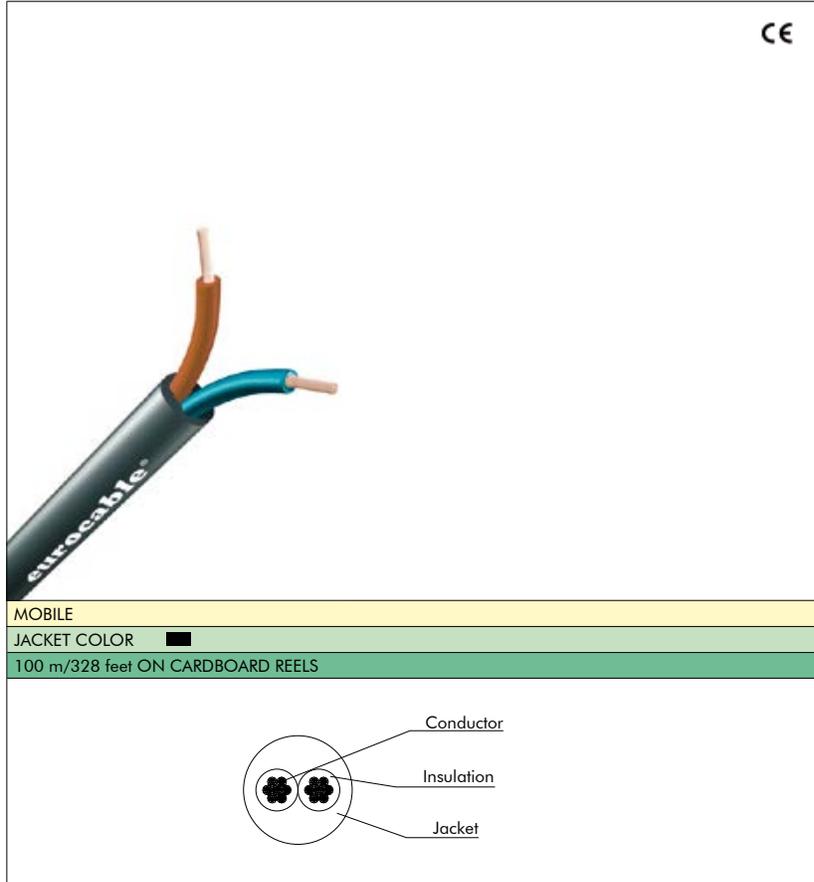

MOBILE  
 JACKET COLOR ■  
 100 m/328 feet ON CARDBOARD REELS



		CVS LK02N15E	CVS LK02N25E
<b>ELECTRICAL DATA</b>			
Rated voltage		300/300V	
D.C.R. at 20°		13.3 ohm/km	7.98 ohm/km
Capacitance		110 pF/m	
<b>GENERAL DATA</b>			
Cable	O.D.	7.40 mm(± 0.2 mm)	8.60 mm(± 0.2 mm)
	Standard reels	100 m	
	Bending radius	10 x O.D.	
	Operating temperature	-20°C/+70°C	
Jacket	Material	PVC TM2	
	Color	Black	
Conductor	Quantity	2	
	Area	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>
	Strand	48 x 0.193 mm	80 x 0.193 mm
	Insulation material	PVC T12	
	Insulation O.D.	2.8 mm	3.4 mm
	Insulation thickness	≥ 0.6 mm	> 0.7 mm
	Insulation color	Blue/Red	
	Material	Electrolytic bare copper	

## Speaker cable with Neutrik speakON connectors

## SIGNAL INTEGRITY

**S21FX215E**  \*

Speaker cable 2x1.5 mm<sup>2</sup> wired with Neutrik speakON 50A connectors



**S21FX225E**  \*

Speaker cable 2x2.5 mm<sup>2</sup> wired with Neutrik speakON 50A connectors



\* Length (meters): **3 5 10 15**  
 Feet  Meters

With packaging, no heat shrink  
 No packaging, no heat shrink

No packaging, with heat shrink  
 With packaging and heat shrink