


Microphone Cables

eurocable microphone cable series have been designed for rugged applications, are anti-trampling, while preserving high flexibility and long flex life in a wide range of conditions, even at temperatures below 0°C. They consist of two insulated twisted conductors and drain wire, all shielded with a high density spiral copper for highly efficient shielding from hum, noise, radio interference and electromagnetic fields. The insulation is made of high quality polyethylene which does not shrink, nor misshape at high temperatures when soldering.

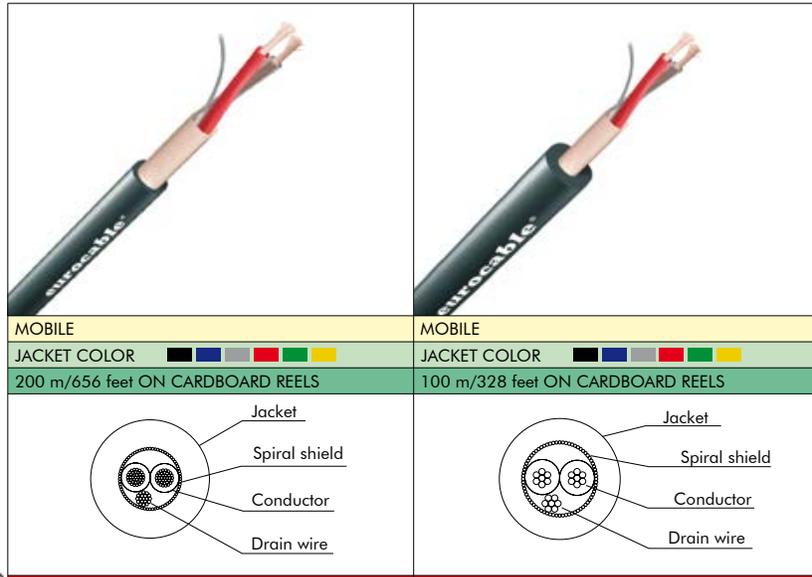

CVS LK02N4.5 CVS LK02N6E

CVS LKCode		02N4.5	02B4.5	02G4.5	02R4.5	02V4.5	02Y4.5	02N6E	02B6E	02G6E	02R6E	02V6E	02Y6E
ELECTRICAL DATA													
D.C.R. at 20°C	Conductor							≤ 78 ohm/km					
	Shield							≤ 39 ohm/km					
Capacitance	Conductor/Conductor 1 KHz							160 pF/m					
	Conductor/Shield 1 KHz							80 pF/m					
Nominal Impedance	1 KHz	450 ohm/100m						600 ohm/100m					
Attenuation	1 KHz							0.50 db/100m					
Inductance								< 58 μH/100 m					
GENERAL DATA													
Cable	O.D.	4.50 mm						6.00 mm					
	Standard reels	200 m						100 m					
	Weight Kg/100m	2.80						4.60					
	Operating temperature	-5°C/+70°C											
Jacket	Material	PVC											
	Color	Black	Blue	Grey	Red	Green	Yellow	Black	Blue	Grey	Red	Green	Yellow
	Nominal Thickness	1.00 mm						1.80 mm					
Shield	Material	Bare copper, Spiral shield plus 20 AWG tinned copper drain wire											
	Coverage	100%											
Conductor	Qty	2											
	Strand	30 x 0.10 mm											
	Area/AWG	0.22 mm ² /24											
	Insul. O.D.	1.10 mm											
	Material	Bare copper polyethylene insulated											

Microphone cables (O.D. 6mm) with Jacks or 3 pin XLR Neutrik connectors **SIGNAL INTEGRITY**

MNJMSEN

Microphone cable wired with Neutrik silver Jack

MNJMSEN

Microphone cable wired with Neutrik black Jack

MNXESSEN

Microphone cable wired with Neutrik XLR 3 silver/silver

MNXEBSSEN

Microphone cable wired with Neutrik XLR 3 black/silver

MNXEBGEN

Microphone cable wired with Neutrik XLR 3 black/gold

* Length (meters): **3 5 10 15**
 □ With packaging, no heat shrink
 U No packaging, with heat shrink
 □ With packaging and heat shrink

□ Feet
 M Meters
 Y No packaging, no heat shrink
 W With packaging and heat shrink

All products are also available with Amphenol connectors

Not suitable for applications above 50 volt ac; 75 volt dc.