


# SSAD AES/EBU 24 AWG Aluminium Foil Shield Multipair

The **eurocable** SSAD 24AWG multipair digital cables have a PURPLE outer jacket. Designed for digital audio equipment and compliant to the standards set by AES/EBU, this cable features 110 ohm nominal impedance and extremely low capacitance. These cables are suitable for carrying multiple high quality digital audio signals in both fixed and outdoor applications. All pairs are individually shielded, twisted, and held together by a holding tape and identified by numbers and letters. SSAD AES/EBU 24 AWG multipair is available in 4, 8 and 12 pairs.



INSTALLATION/MOBILE  
 DIGITAL  
 JACKET COLOR ■  
 305 m/1000 feet ON WOODEN REELS

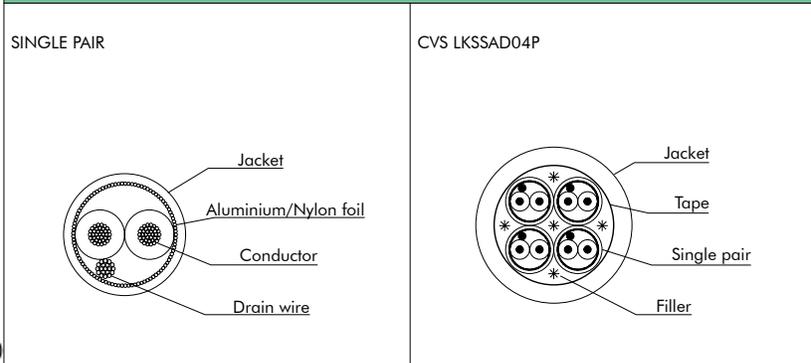

CVS LKSSADCode	04P	08P	12P	
<b>ELECTRICAL DATA</b>				
D.C.R. at 20°C	Conductor	< 95 ohm/km		
	Shield	< 40 ohm/km		
Capacitance	Conductor/Conductor 1 KHz	50 pF/m		
	Conductor/Shield 1 KHz	100 pF/m		
Nominal Impedance	3 - 8 MHz	110 ohm/100 m		
Attenuation	3 - 8 MHz	7 - 10 db/100 m		
Vel. of Prop.		80%		
<b>GENERAL DATA</b>				
Pairs cable	4	8	12	
Cable	O.D.	11.50 mm	14.60 mm	17.60 mm
	Standard reels	305 m/1000 ft		
	Weight Kg/100m	12.00	18.00	25.00
Operating temperature	-20°C/+70°C			
Jacket	Material	PVC		
	Nominal Thickness	1.30 mm		
Shield	Material	Aluminium - polyester tape plus tinned copper drain wire (7 x 0.20 mm)		
	Coverage	100%		
Conductor	Qty	4 x 2	8 x 2	12 x 2
	Strand	7 x 0.20 mm		
	Area/AWG	0.20 mm <sup>2</sup> /24		
	Insul. O.D.	1.45 mm		
	Material	Annealed tinned copper cellular polyolefine insulated		

Not suitable for applications above 50 volt ac; 75 volt dc.