





DGLink Gigabit Switches


HW N210

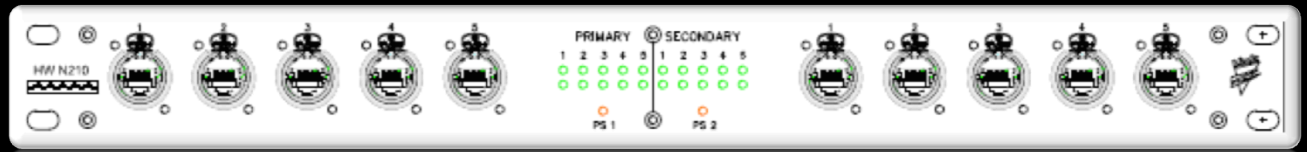


HW C10

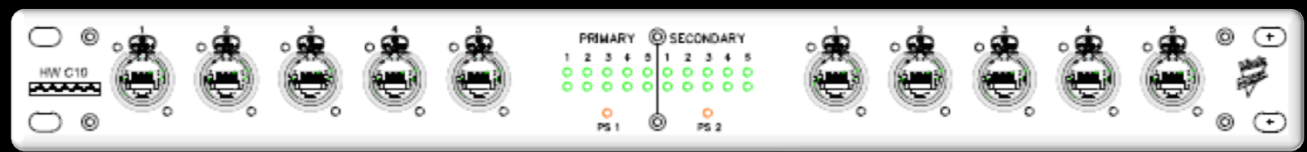

HW C220

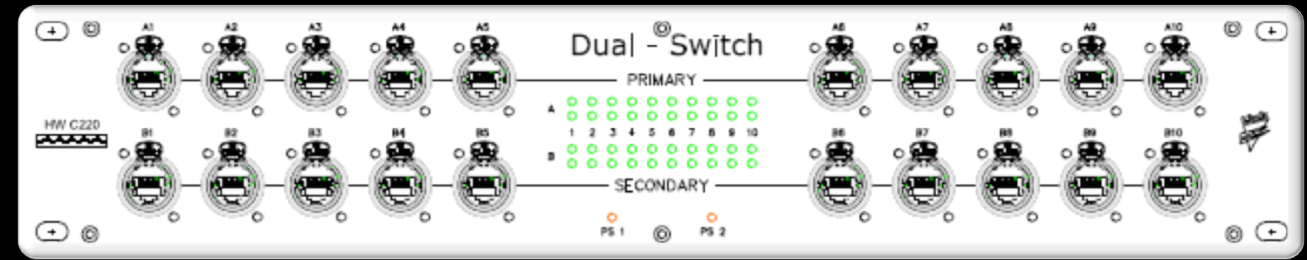

HW C218-2

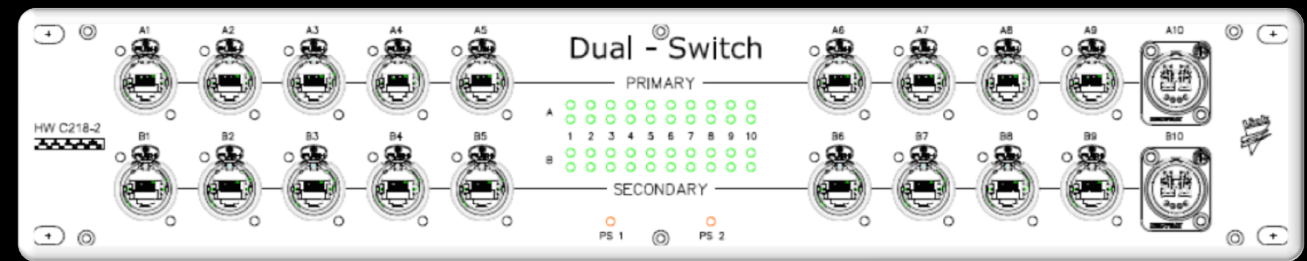



Features & Performance Specifications

Features	HW C08-2	HW C10	HW C10N05		HW C218-2 Prim/Sec	HW C220 Prim/Sec	HW N210 Prim/Sec
			Primary	Secondary			
RJ45 ports (10/100/1000 Mbps)	8	10	10	5	9+9	10+10	5+5
SFP ports	2				1+1		
Connectors	EtherCon, OpticalCon	EtherCon	EtherCon		EtherCon, OpticalCon	EtherCon	EtherCon
Power supply	Dual 110 -240 Vdc	Dual 110 -240 Vdc	Dual 110 -240 Vdc	Dual 110 -240 Vdc	Dual 110 -240 Vdc	Dual 110 -240 Vdc	Dual 110 -240 Vdc
Switch redundancy	Virtual	Virtual	Full		Full	Full	Full
Spanning Tree	Yes	Yes	Yes				
IGMP	1, 2, and 3 snooping	1, 2, and 3 snooping	1, 2, and 3 snooping	1, 2, and 3 snooping	1, 2, and 3 snooping	1, 2, and 3 snooping	1, 2, and 3 snooping
QoS	4 Hardware queues	4 Hardware queues	4 Hardware queues	4 Hardware queues	4 Hardware queues	4 Hardware queues	4 Hardware queues
Vlan	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Layer 3	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ACL Filter	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Ipv6	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Port mirroring	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bandwidth management	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Storm control	Yes	Yes	Yes	Yes	Yes	Yes	Yes
SNMP	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Jumbo frames	10 KB	10 KB	10 KB	9 KB	10 KB	10 KB	9 KB
MAC table	up to 8000	up to 8000	up to 8000	up to 4000	up to 8000	up to 8000	up to 4000
Bonjour protocol	Yes	Yes	Yes		Yes	Yes	
LEDs	Activity / Speed (1Gpbs)	Activity / Speed (1Gpbs)	Activity / Speed (1Gpbs)	Activity / Speed (1Gpbs)	Activity / Speed (1Gpbs)	Activity / Speed (1Gpbs)	Activity / Speed (1Gpbs)
Flash memory	16MB	4MB	4MB	1.2MB	4MB	4MB	1.2MB
CPU memory	128MB	128MB	128MB	NA	128MB	128MB	NA

Link srl

Via Pieve Torina, 48 - 00156 Roma - Italy
www.linkitaly.com - Phone +39 06 227251 Fax +39 06 22725225

LINK USA, Inc.

2413 Parmenter Street - Suite #140 - Middleton, WI 53562
www.linkusa-inc.com - Phone: +1 608-826-4680 - Fax: +1 608-826-4689